

# Installation Schematic




## Typical Installation with Remineralisation bestaqua 14 ROC (Coffee)

**Important pre installation detail:**  
Incoming water:

Pressure  
**Minimum: 150 kPa** - if < 150 kPa seek advice  
**Maximum: 400 kPa** - if > 400 kPa use pressure limiting valve ( PLV350AK1 or similar)

Flow  
**Minimum 10 lpm** - check water tap for flow if < 10 lpm seek advice  
To check flow rate: run tap into a bucket for 30 secs. Measure water in litres.  
Multiply x 2 = litres per minute (lpm)

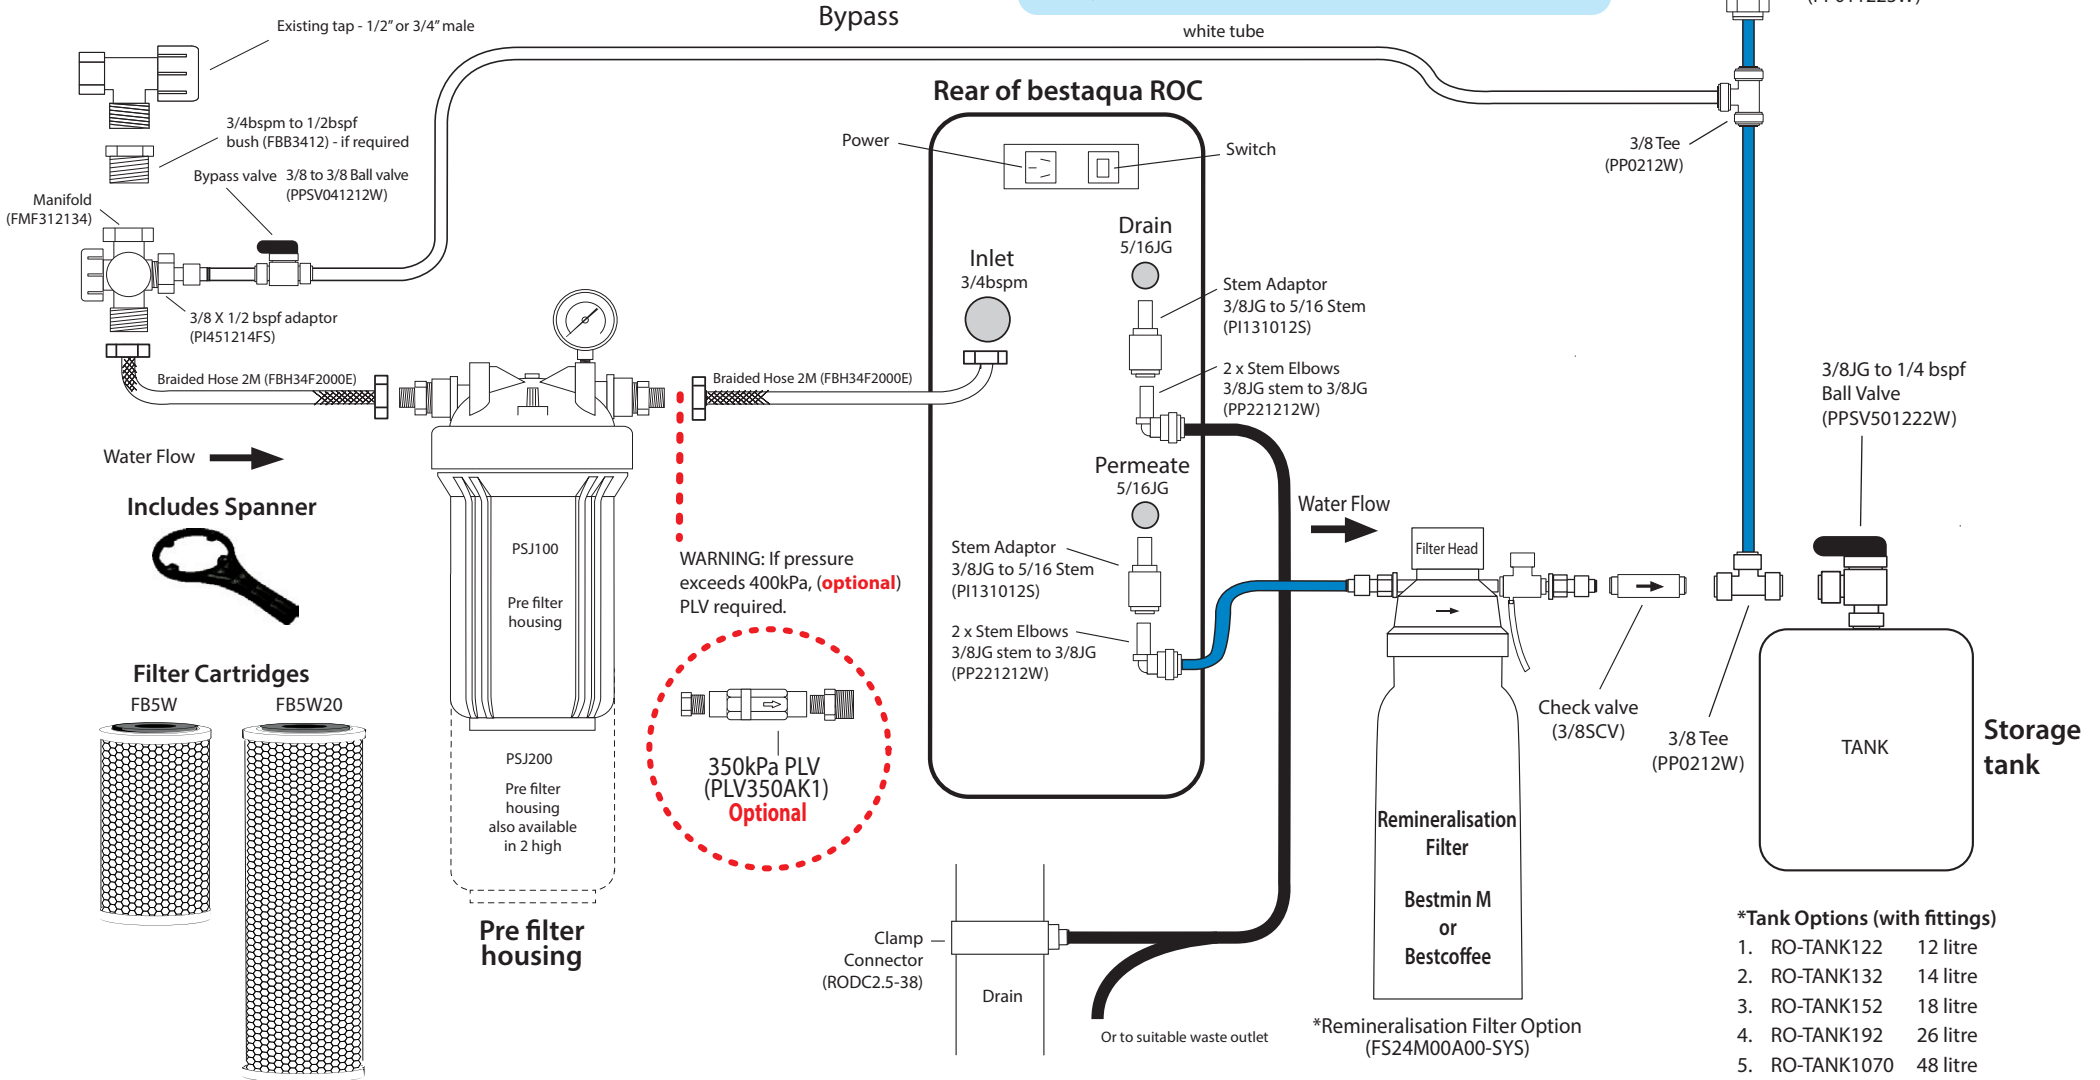

1300 720 299

sales@bwtaustralia.com.au  
www.bwtaustralia.com.au